SUBMITTAL DATA – CASSETTE TYPE
LISH012160U332 - LICH8012160U332
SINGLE ZONE INVERTER MINI-SPLIT HEAT PUMP

Job:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	

FEATURES

Outdoor Unit: **LISH012160U332**
Outdoor Unit Cat Number: **37H74**



- DC Inverter Compressor
- DC ODU Motor
- DC Electronic Expansion Valve(EXV)

Indoor Unit: **LICH8012160U332**
Indoor Unit Cat Number: **37J07**



- Auto Restart
- 360° Airflow
- DC IDU Motor
- Washable Filter
- Built-in electric box

PIPING

Line Set and Elevation Guidelines	
Maximum Line Set Length ft. (m)	98.4 ft. (30 m)
Maximum Elevation - Outdoor Unit Below/Above Indoor Unit ft. (m)	49.2 ft. (15 m)
Liquid Line Set Diameter (in.)	1/4"
Gas Line Set Diameter (in.)	3/8''

PRODUCT WARRANTY

5 Year Limited Warranty*

OPTIONAL ACCESORIES

WIFI Wired Control (37J42 LCACWIFI1-1332)

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency

495616 (202407) ©2024 Lennox Industries, Inc.

SUBMITTAL DATA – CASSETTE TYPE
LISH012160U332 - LICH8012160U332
SINGLE ZONE INVERTER MINI-SPLIT HEAT PUMP

OUTDOOR SPECIFICATIONS

PERFORMANCE	
Cooling Capacity (Btu/h)	11,900
EER(W/W)	3.80
SEER(BTUH/W)	16
Heating Capacity (Btu/h)	13,600
HSPF	8

Outdoor Fan Total Air Volume (CFM)	1,059
Ambient Temperature Operating Range	
Cooling	5°F(-15°C) - 118°F(48°C)
Heating	5°F(-15°C) - 75°F(24°C)

ELECTRICAL DATA	
Power Supply (V/Hz/ϕ)	220-240-50/60-1
Rated Current (A)	6
Minimum Circuit Ampacity (A)	-
Maximum Overcurrent Protection (A)	-
Compressor RLA (A)	4.4
No. of Compressors	1


GENERAL DATA	
Connection Ratio (%)	100%
Max. # of Indoor Units	1
Sound Data (dBA) - Cooling/Heating	48
Refrigerant type	R32
Factory refrigerant charge	1.26 lbs. 20.1 oz.

DIMENSIONS		
Unit Dimensions (in)	Height	21.8
	Width	26.6
	Depth	11.2
Shipping Weight (lb)		59.5
Net Weight (lb)		54.0

NOTES

1. Cooling and Heating Capacity data is rated at the following conditions:
Cooling: 80°FDB / 67°FWB Indoor, 95°FDB/ 75°FWB Outdoor
Heating: 68°FDB / 59°FWB Indoor, 45°FDB/ 43°FWB

OUTDOOR DIMENSIONAL DRAWINGS - INCHES (MM)

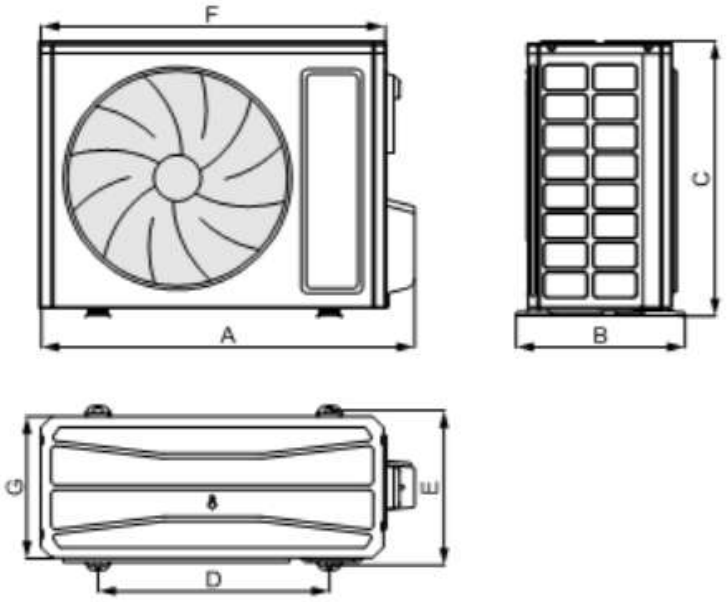

ODU	UNIT	A	B	C	D	E	F	G
12K/18K	mm	732	330	553	455	310	675	285
	inch	28.82	12.99	21.77	17.91	12.20	26.57	11.22

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency

495616 (202407) ©2024 Lennox Industries, Inc.

SUBMITTAL DATA – CASSETTE TYPE
LISH012160U332 - LICH8012160U332
SINGLE ZONE INVERTER MINI-SPLIT HEAT PUMP

INDOOR SPECIFICATIONS

PERFORMANCE

Airflow (CFM)	Turbo	353
	High	324
	Medium	294
	Low	235
External Static Pressure (in. w.g.)		-
Sound Pressure (dBA)	Turbo	36
	High	35
	Medium	33
	Low	29

ELECTRICAL DATA

Power Supply (V/Hz/ϕ)	220-240-50/60-1
Full load amps (FLA)	-
Power Output (W)	-

DIMENSIONS

Unit Dimensions (in)	Height	10.2
	Width	22.4
	Depth	22.4
Unit Net/Shipping Weight (lb)		36.38/46.31


WIRELESS REMOTE CONTROLLER SPECIFICATION

37B67 (YAP1F7)


Power Supply	2 AAA Batteries (Included)
Setpoint Range	61°F(16ºC) - 86°F(30ºC)
Effective Receiving Range	26 ft.(8m)

DISPLAY





INDOOR DIMENSIONAL DRAWINGS - INCHES (MM)

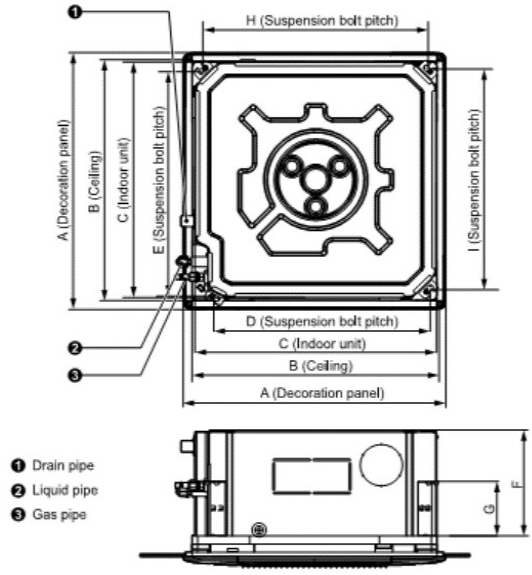

IDU	UNIT	A	B	C	D	E	F	G	H	I
12K/18K	mm	620	580	570	505	550	265	140	530	530
	inch	24.4	22.8	22.4	19.9	21.7	10.4	5.5	20.9	20.9

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency

495616 (202407) ©2024 Lennox Industries, Inc.